

Trek Verve 2 Specifications

Frameset

Frame: Alpha Gold Aluminum, DuoTrap S compatible, rack & fender mounts

Fork: Alloy w/lowrider mounts

Wheels

Front Hub: Formula FM21 alloy

Rear Hub: Alloy

Rims: Bontrager Connection alloy, 32h

Tires: Bontrager H5, 700x45c

Drivetrain

Shifters: Shimano Altus EF500, 8 speed

Front derailleur: Shimano Tourney TY71

Rear derailleur: Shimano Altus M310

Crank: Forged alloy, 48/38/28 w/chainguard

Bottom bracket: Sealed cartridge

Cassette: Shimano HG31, 11-32, 8 speed

Chain: KMC Z7

Pedals: Bontrager Satellite City

Components

Saddle: Bontrager padded

Seat Post: Alloy, adjustable suspension, 27.2mm

Handlebar: Bontrager alloy, 31.8mm comfort sweep

Grips: Bontrager Satellite, ergonomic

Stem: Bontrager alloy, 31.8mm, adjustable rise, Blendr compatible

Headset: 1-1/8", semi-integrated, semi-cartridge bearings


Brake Set: Tektro alloy linear-pull

Weight

Weight: M - 12.59 kg / 27.76 lbs

Weight limit: Maximum total weight limit (combined weight of bicycle, rider, and cargo) 300 pounds (136 kg).

	S	M	L	XL
Rider Height	155.0 - 165.0 cm 5'1.0" - 5'5.0"	165.0 - 175.0 cm 5'5.0" - 5'8.9"	175.0 - 186.0 cm 5'8.9" - 6'1.2"	186.0 - 197.0 cm 6'1.2" - 6'5.6"
Inseam	72.0 - 78.0 cm 28.3" - 30.7"	77.0 - 83.0 cm 30.3" - 32.7"	82.0 - 88.0 cm 32.3" - 34.6"	87.0 - 93.0 cm 34.3" - 36.6"

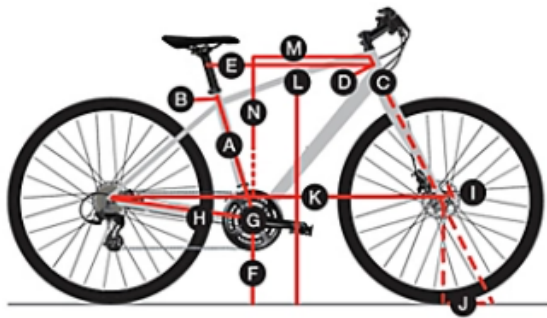

All measurements provided in cm unless otherwise noted.

Frame size letter	S	M	L	XL
Wheel size	700c	700c	700c	700c
A – Seat tube	37.0	43.0	48.5	55.0
B – Seat tube angle	74.5°	73.5°	72.0°	72.0°
C – Head tube length	14.0	15.0	16.0	18.0
D – Head angle	70.5°	70.5°	70.5°	70.5°
E – Effective top tube	55.2	57.5	59.8	61.2
F – Bottom bracket height	30.1	30.1	30.1	30.1
G – Bottom bracket drop	6.2	6.2	6.2	6.2
H – Chainstay length	47.0	47.0	47.0	47.0
I – Offset	4.5	4.5	4.5	4.5
J – Trail	8.1	8.1	8.1	8.1
K – Wheelbase	109.2	110.0	110.3	111.8
L – Standover	71.8	76.9	80.3	84.6
M – Frame reach	38.2	38.7	39.2	40.0
N – Frame stack	61.5	62.4	63.4	65.3